

Design and Analysis of Earthquake Resistant Building (Three Storey RCC) Using STAAD Pro

Dr. N Bhaskara rao ¹, B Srinivasarao ², G KomalRaj ³

¹ professor, ²Associate Professor, ³ Assistant professor

Department of Civil Engineering

Priyadarshini Institute of Technology & Science, Tenali, Guntur

Abstract - With the advent of advanced technology, public buildings such as high-rise buildings and long-distance bridges are designed to evolve, increasing their inclination to the outside world. Therefore, these structures are at risk of extreme vibrations under the influence of strong winds and earthquakes. To protect these public buildings from severe structural damage, the earthquake response of these structures is analyzed and the calculation of wind power and forces such as support and removal of members are calculated and included in the design of the building that resists vibration. The main purpose of this paper is to construct an earthquake-resistant structure by conducting seismic research of the structure in an equitable analysis and analysis and design of the structure using STAAD. Pro software. To this end, the 'Three-School School in Nagpur' is being considered. Seismic statistics are designed for the 3rd seismic zone, the 3rd aspect of Response reduction, the standard temporal

resistance framework and the value factor 1. The structural safety of a building is ensured by calculating all active loads on the building, including side wind and seismic excitation.

Keywords: STAAD. Pro, analysis, seismic strength, standard duration resistance, critical time, intermediate flow, balanced static analysis, IS code.

1. INTRODUCTION:

Building design is the science of analyzing and designing and building with great potential, safety, usability and economy. It requires not only logical thinking and imagination but also instruction to adhere to design standards specified by the appropriate country design code, for example, IS code. Any construction project starts from the planning phase to meet the stated needs of the client. Although the client may be unaware of the possible conditions that exist within the site and have

unprecedented expectations, it is the sole responsibility of the building developer to perform. Challenge and meet design requirements for strength, resilience, economy and security. Existing land shortages due to population explosions always require the construction of high-rise buildings. As the ground floor of these multi-storey buildings grows, the building is exposed to external forces under the influence of earthquakes and wind pressure, thus leading to structural instability and later complete structural failure. In order to enable tall buildings to withstand those lateral forces, an earthquake and wind analysis must be done and incorporated into the final construction of the building.

Every structure follows a specific path from its initiation to ultimate design as follows: → Structural planning of the building. → Calculation of applied loads. → Structural analysis of the building → Design of the building as per analysis. → Drawing and detailing of the structural members. → Preparation of schedule.

STAAD. Pro provides a design engineer with excellent user interface and tools needed to place dead and unloaded load and active external loads on the site. It has a powerful engine of advanced flexibility

analysis that considers many loading combinations and produces the right structure structure. The software provides easy access to view reaction power, joint removal, clipping power and bending moment that works with different beams and columns in the processing mode due to the loading conditions used in the structure. STAAD. Pro provides a great interface for making wood, aluminum and concrete building structure, bridge and water tank. From model generation to final design, the software delivers accurate results and delivers final output that contains the structure structure of all the beams and columns within the structure.

2. OBJECTIVES

The primary objective of this paper is to undergo lateral load analysis and design an earthquake resistant structure on STAAD. Pro. The objectives have been specified as follows: → Generation of building model on STAAD. Pro. → Load calculation due to different loading conditions. → Application of loads on STAAD. Pro model. → Analysis of the structure on STAAD. Pro. → Study of the reaction forces, shear force, bending moment and node displacement. → Design of the building.

3. METHODOLOGY TO UNDERTAKE ANALYSIS AND DESIGN OF THREE STOREY SCHOOL ON STAAD. PRO

Step 1: Construction of the Nodal point. Regarding the position of the column in the layout structure, we have some important points included in the STAAD model. Step 2: Representation of the frame and column.

4 : ANALYSIS OF THREE STOREY SCHOOL

An equally consistent research method is selected for the following structure. This method describes a series of forces acting on a building to represent the effect of earthquake vibrations, usually expressed by a seismic style spectrum. It observes that the structure vibrates in its basic form. For this to be true, the building must be low-lying and not too rigid with the ground. A map of India's seismic segmentation provided below divides each area as zone I, II, III and IV.

Based on nodal points, with the help of adding a beam command to STAAD. Pro, beam and columns have done. Step 3: Assign member support and assets. After column production, support is provided under each column as grounded foundations. Later, based on load calculation, a beam

with a cross-sections column is assigned. Step 4: 3D view. After assigning a member property, a 3D view of the property can be displayed. Step 5: Dead Load Activity. According to IS: 875 (Part 1) - 1987, dead loads are assigned based on member load, floor load and personal weight of the beams. Step 6: Live upload function. According to IS: 875 (Part 2) - 1987, a live load of 2KN / m² was assigned to members. Step 7: Seismic load function. After creating the appropriate seismic definition according to the requirements of IS 1893 (Part 1): 2002, the seismic load is assigned in respect of the + X, -X, + Z and -Z guides with the appropriate seismic factor. Step-8: Wind load assignment. After installing wind power and creating air definition according to IS: 875 (Part 3) - 1987, air loads were allocated according to directions + X, -X, + Z and -Z. Step 9: Upload a combination of assignments. Different compilation case cases are provided for the model based on the specified loading combinations as long as the IS CODES are also available in STAAD. Pro. Step 10: Structural analysis in STAAD. Pro. With the help of Run Analysis Command, the structure is analyzed and a detailed study of the strength and moment of bending is done in Postprocessing mode. Step 11: Structure Design in STAAD. Pro

and Output Generation. The design is made in accordance with IS 456: 2000. M25 concrete and FE415 are used as design parameters. 4% metal tool is specified according to IS Code standards and design parameters are assigned to beam and column respectively. After the final construction of the structure, an output file is generated containing the structure of the entire beam and column member.

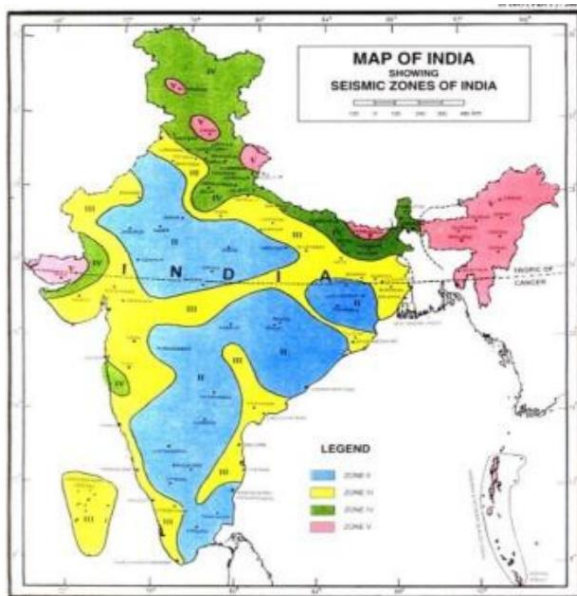


Fig – 1: Seismic zoning map of India.

The building is designed for the following parameters: Site location: Nagpur in the Seismic Zone - II Soil type: Medium soil. Permissible carrying pressure: 150KN / m² Response reduction factor (R) - 3 of the OMRC. Number of Stairs: 2 Floor height: 3.3m Exterior wall thickness: 230mm

Internal wall thickness: 150mm Beam size: - 230x250 mm - 230x300 mm - 230x350 mm - 230x400 mm Column size: - 230x400 mm - 230x500 mm - 250x600 mm - 300x1000 mm (stairs). Slab size: 120 Live load: 2KN / m² Air Load: IS: 875- (Part-3). Earthquake load: IS: 1893-2002 (Part 1). Concrete Range: M25 Steel Range: FE415 STAAD. Pro plan and model of the Three-Storey School viewed below.

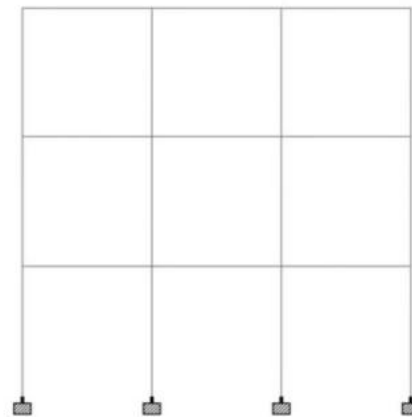


Fig – 2: STAAD. Pro Line Plan

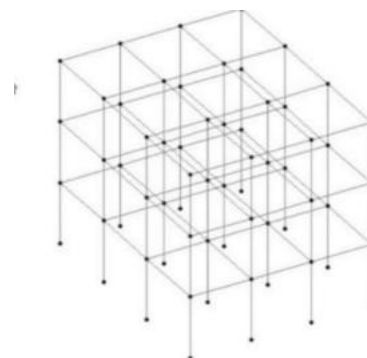


Fig – 3: STAAD. Pro model

In order to make the building resistant to earthquakes, the basic value of the building while vibration should be calculated and given as an input to STAAD. professional earthquake analysis. The idea of building is in Nagpur. Earthquake parameters according to (IS 1893 (Part 1): 2002) are described below: Seismic Zone - II (IS 1893 (Part 1): 2002) Release Area (Z) - 0.16 (Table Two, IS 1893 (Part 1): 2002) Key issue - 1 (Table 6, IS 1893 (Part 1): 2002) Issue Reduction Issue - 3 (Table 7, IS 1893 (Part 1): 2002) Basic value (Ta): The solid formula for the basic natural vibration resistance of a solid frame structure provided with a brick filling panel is given to IS: 1893 first half as follows, Basic value = $0.09h / (d)^{1/2}$ (Section 7.6.2, IS 1893 (Part 1): 2002). The layout of the building is 37.8 x 12.7 m. Building height (h) = 39.6m Building (dx) = 37.8 m building width (dz) = twelve.7 m X period guide (PX) = $0.09 \times 39.6 / (37.8)^{1/2} = 0.58$ seconds Z time direction (PZ) = $0.09 \times 39.6 / (12.7)^{1/2} = 1$ second These figures are provided as input into the seismic definition in STAAD. professional strength and vibration ar calculated. The force of the earthquake operating on the structure is shown below.

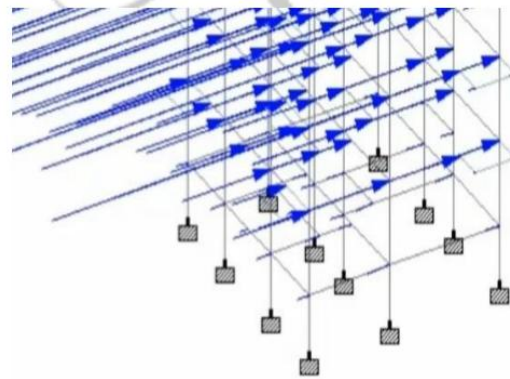


Fig – 4: seismic Force on STAAD model

4. CONCLUSION

The 3-story School building was analyzed and described as STAAD for bullying. Pro. Seismic Associate in Nursing wind forces are considered and the building is intended as an earthquake-resistant structure. Severe deviation from earthquakes and winds should be limited for a number of reasons so the strength of the simple structure is very important. As a result, drift between stories has to be experienced from time to time. With a specific small-sized force with a ratio of 1.0, the flow between the stories should be less than $0.04 \times H_s$, any (H_s) is the length of the story (Section 7.11.1, IS 1893 (Part 1): 2002). With a floor height of 3300 mm, slope between floors = $0.04 \times 3300 = 13.2$ mm. some related shifts within each story within the structure are below the inter-story drift limit and are therefore safe.

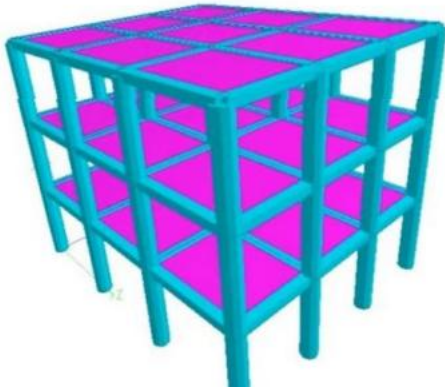


Fig – 5: STAAD. professional 3D Rendered Model

REFERENCES

[1]D.R. Deshmukh, Yadav, A.K., Supekar, S.N., Thakur, A.B., Sonawane, H.P., Jain, I.M., (2016). “Analysis and style of G+19 Storied Building exploitation Staad-Pro”. Int. journal of engineering analysis and application (IJERA), ISSN: 2248- 9622, Vol 6, Issue 7.

[2] Anoop. A., Fousiya H., Neeraja. R., Rahul, C., Shabina, S., Varsha, S., (2016). “Planing Analysis and style of Multi Storied Building by STAAD. Pro. V8i”. Int. Journal of Scientific & Engineering analysis (IJSER), ISSN 2229- 5518, Vol 7, Issue 4.

[[3] Bedabrata, B., Nagender, A.S.V, (2007). “Computer powerassisted analysis and style of multistoreyed buildings”. Ethesis at NIT Rourkela.

[[4] IS 1893 (Part 1): 2002 “Criteria for Earthquake Resistant style of Structures”.

[[5] IS: 875 (Part 2): 1987 “Imposed Loads”.